

Coaxial

Power Splitter/Combiner

ZSC-2-2

2 Way-0° 50Ω 0.002 to 60 MHz



Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

At low range frequency band (f_L to $10 f_L$), linearly derate maximum input power by 13 dB.

Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

Outline Drawing

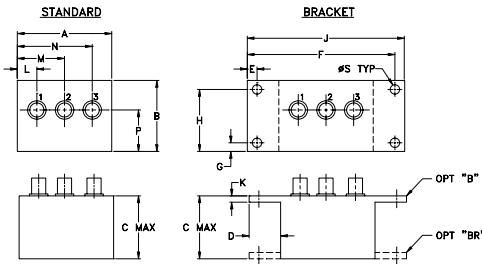

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45

J	K	L	M	N	P	S	wt
3.25	.10	.40	1.15	1.86	.64	.150	grams
82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

Features

- low insertion loss, 0.3 dB typ.
- high isolation, 30 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- excellent VSWR, 1.1:1 typ.
- rugged shielded case

Applications

- HF
- amateur radio




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)			
	L*		M		U		L		M		U		L	M	U	L	M	U	
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	
f_L - f_U																			
0.002-60	25	20	30	20	27	20	0.3	0.6	0.3	0.6	0.6	1.0	2	3	4	0.15	0.25	0.30	

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
 * Isolation specified to 0.006 MHz.

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.002	3.16	3.16	0.00	27.14	0.02	1.16	1.26	1.25
1.000	3.07	3.07	0.00	38.30	0.00	1.10	1.03	1.03
4.000	3.12	3.12	0.00	36.75	0.00	1.11	1.02	1.02
7.000	3.16	3.16	0.00	34.64	0.01	1.12	1.02	1.02
10.000	3.20	3.20	0.00	32.84	0.02	1.13	1.01	1.01
16.000	3.26	3.26	0.00	30.25	0.03	1.14	1.01	1.01
20.000	3.30	3.30	0.00	29.06	0.03	1.15	1.02	1.02
24.000	3.33	3.33	0.00	28.17	0.03	1.15	1.03	1.03
28.000	3.36	3.36	0.00	27.55	0.03	1.15	1.05	1.05
32.500	3.40	3.39	0.00	27.09	0.03	1.14	1.06	1.06
40.000	3.46	3.45	0.00	26.88	0.04	1.13	1.10	1.10
47.500	3.52	3.52	0.00	27.26	0.04	1.11	1.14	1.14
50.000	3.54	3.54	0.00	27.49	0.04	1.10	1.15	1.15
55.000	3.59	3.59	0.00	27.99	0.04	1.10	1.18	1.18
60.000	3.64	3.63	0.00	28.23	0.04	1.11	1.21	1.22

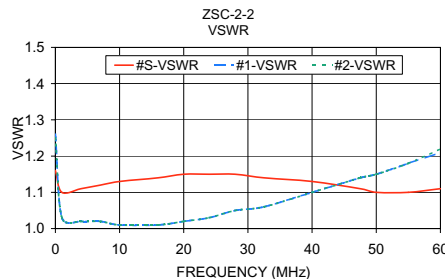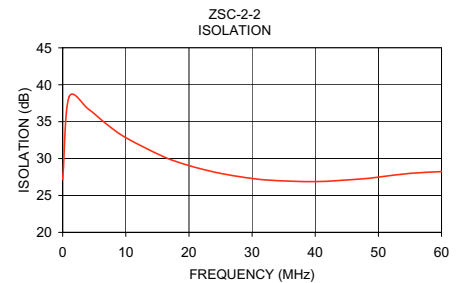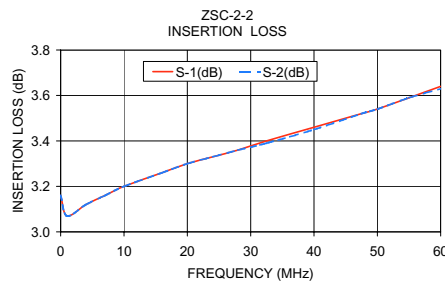

electrical schematic



Mini-Circuits®
 ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

REV. OR
 M94482
 ZSC-2-2
 HY/TD/CP
 070319

RF/IF MICROWAVE COMPONENTS